






PERFECT ACCESS FROM EXIT 169, 164

GREAT VISIBILITY FROM D6 EXPRESSWAY

 PANATTONI

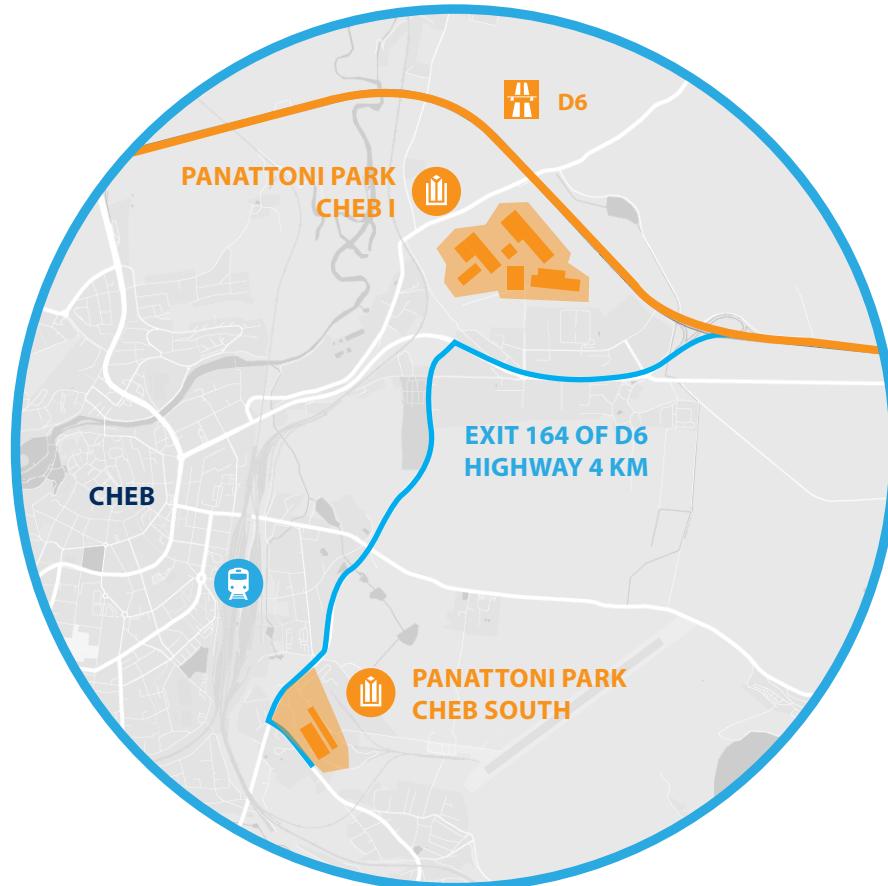


Key distances

- Cheb city (3 km, 11 min)
- German borders (14.3 km, 15 min)
- Sokolov (29 km, 20 min)
- Karlovy Vary (40 km, 30 min)
- Pilsen (111 km, 2 hrs 20 min)
- Ústí nad Labem (165 km, 2 hrs 5 min)
- Prague (173 km, 2 hrs 30 min)

Public Transportation

Railway connections from Chomutov, Marktredwitz
Bus connections from city of Cheb and nearby
suburbs operated on daily basis

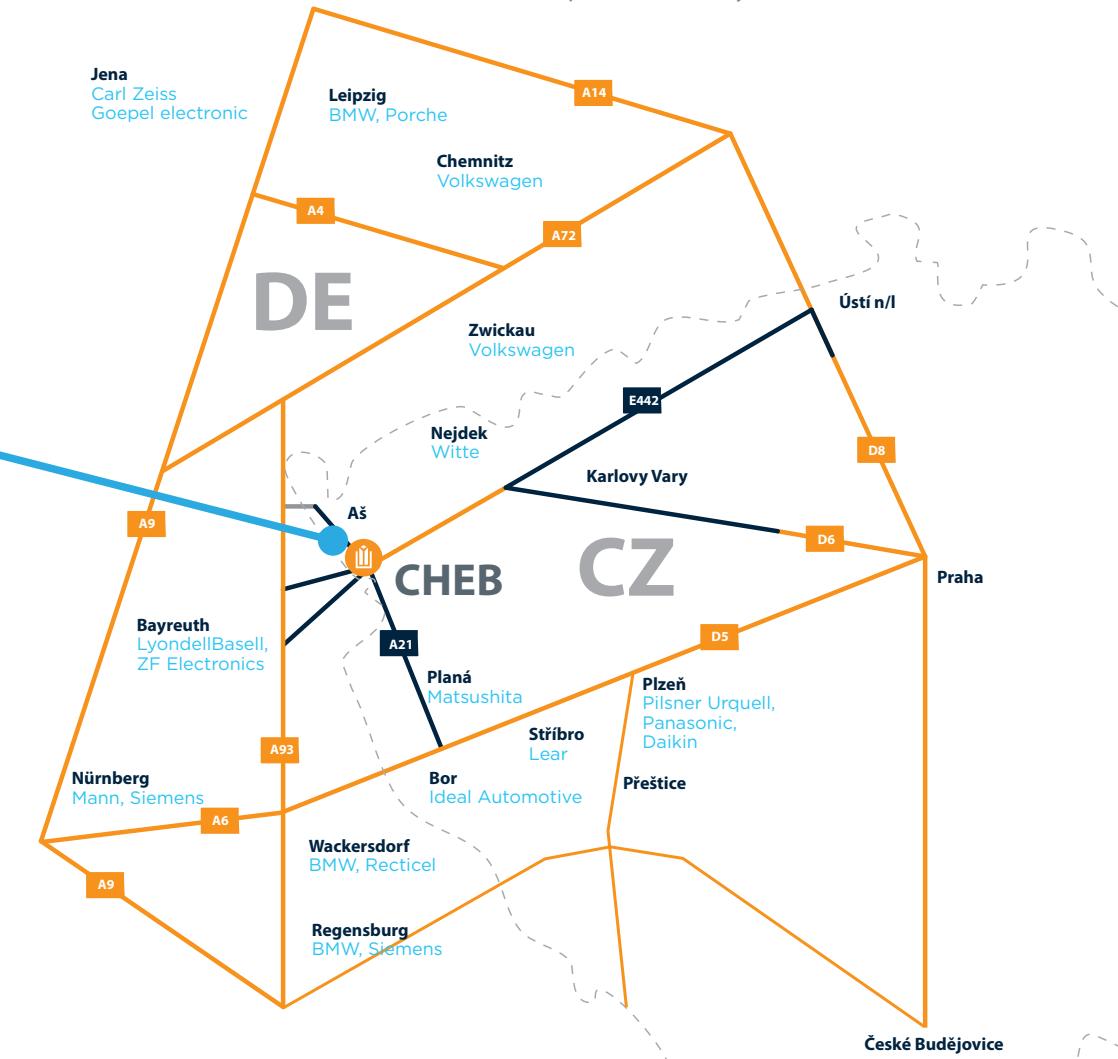

Supporting structure

- Pad or pilot foundations, insulated plinth panels up to 300 mm above floor
- Prefabricated concrete columns in 12 x 24 m grid or per layout
- Prefabricated concrete or steel roof beams, clear height of 10 m

Floor

- Fibre reinforced concrete floor, PE membrane, cut joints, 180 mm thick, surface treated with hardener
- Load capacity of 50 kN/sq m, 60 kN point load
- Flatness according to DIN 1822, table 3, line 3

Roof

- Corrugated steel sheets, mineral wool insulation, PVC membrane
- Free load capacity of 15 kg/sq m for clients installations
- Min. 2% of skylights in warehouse area
- Syphonic drainage system, emergency overflows

Facade

- Horizontal sandwich panels with mineral wool insulation
- Prefabricated concrete facade around docks to approx. 4.5 m height
- Double glazed windows in offices

Docks

- 1x electrically operated 3.0 x 3.0 m dock for each 1,000 sq m of hall
- Each dock equipped with hydraulic leveller, 60 kN capacity, PE shelter, wheel guides
- 1x electrically operated 4.0 x 4.5 m drive-in gate for each 5,000 sq m of hall



Hall installations

- Gas Sahara heaters or infrared gas radiators, heating according to norms for warehousing
- ESFR sprinklers under roof, FM Global certified tank and pumps
- 200 lux LED lighting (excluding influence of clients installations)
- 1x 630 kVA dry transformer station per each 25,000 sq m of hall

Production upgrade (optional)

- Increased facade and roof insulation
- Heating and ventilation in accordance with code for manufacturing (assembly)
- 300 lux LED lighting (excluding influence of clients installations)
- Increased percentage of skylights area

Offices

- 2 level custom designed in-built, incl. offices, socials, locker rooms, day room, excl. furniture and appliance
- Aluminium entrance door with canopy to entrance lobby
- Tiles, carpets or PVC floor surfaces, suspended mineral ceiling panels
- Social rooms with ceramic fixtures, wall tiles, and basic accessories
- PVC cable trays below windows, 2x 220 V socket each 8 sq m
- Server room with 2 split units and antistatic PVC floor
- Top cooling

Outside areas

- Hard areas from concrete pavers, sloped for drainage
- 2 m high mesh fence, entrance barriers and manual gate
- Green areas with grass, bushes, and trees

DEVELOPMENT CONCEPT

